


配管法兰盘 FL1, FL


Flanges

符合 SAE J518c (标准压力) 4 螺栓法兰盘 FL1


●螺纹型

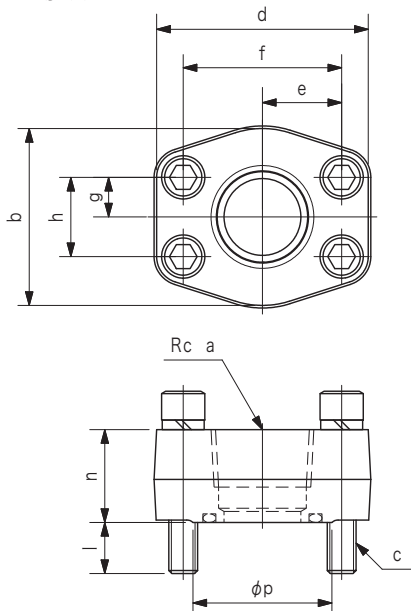

●焊接型

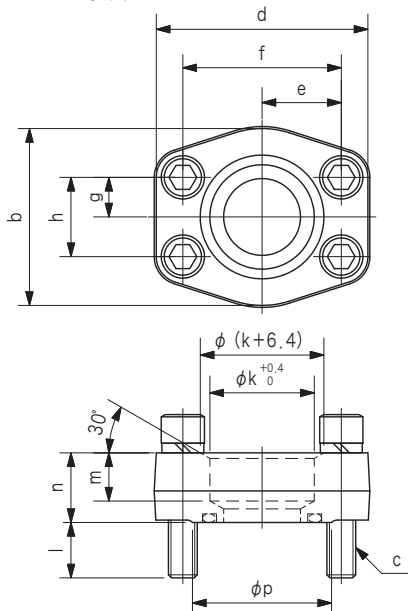

●对接孔

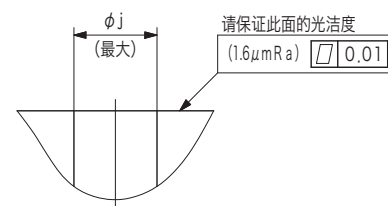

注)

- 用于 SAE 4 螺栓法兰盘接口。
- 附带 O 型圈、螺栓、弹簧垫圈。
- 最高使用压力为 21MPa (但 ※ 号部分为 3.5MPa)。

尺寸表 (统一螺纹)


型号		公称	a	b	c	d	e	f	g	h	j	k	l	m	n	p	O型圈尺寸规格 AS568-
螺纹型	焊接型																
FL1-6-06P-10-JA-S4-J		3/4	3/4	52.5	3/8-16 UNC	65	23.8	47.6	11.1	22.2	19.1		13.5		27.8	39.7	214
	FL1-6-06W-10-JA											27.7	15.8	14.3	19.1		
FL1-8-08P-10-JA-S4-J		1	1	58.5	3/8-16 UNC	70	26.2	52.4	13.1	26.2	25.4		16.9		30.7	46	219
	FL1-8-08W-10-JA											34.5	18.3	15.9	23		
FL1-10-10P-10-JA-S4-J		1-1/4	1-1/4	73	7/16-14 UNC	79	29.4	58.7	15.1	30.2	31.8		18		36	52.4	222
	FL1-10-10W-10-JA											43.2	19	17.5	28.6		
FL1-12-12P-10-JA-S4-J		1-1/2	1-1/2	82.5	1/2-13 UNC	93.5	35	69.9	17.8	35.7	38.1		18.5		40.6	61.9	225
	FL1-12-12W-10-JA											49.1	20.8	19.1	32		
FL1-16-16P-10-JA-S4-J		2	2	96.5	1/2-13 UNC	101.5	38.9	77.8	21.5	42.9	50.8		18.5		40.6	73	228
	FL1-16-16W-10-JA											61.1	22.3	22.2	36.8		
FL1-20-20P-10-JA-S4-J		2-1/2	2-1/2	108.5	1/2-13 UNC	114.5	44.5	88.9	25.4	50.8	63.5		22.8		49	85.7	232
	FL1-20-20W-10-JA											77.1		25.4			
FL1-24-24P-10-JA-S4-J		3	3	131	5/8-11 UNC	135	53.2	106.4	31	61.9	76.2		22.8		49	103.2	237
	FL1-24-24W-10-JA											90	24.2	31.8	54		
※FL1-24-24P-LP-10-JA-S4-J			3										16.5		49		
	※FL1-24-24W-LP-10-JA											90	17.8	31.8	54		
	※FL1-28-28W-10-JA	3-1/2		140	5/8-11 UNC	152.5	60.4	120.7	35	69.9	88.9	103	28.9	30.2	36.6	115	241
	※FL1-32-32W-10-JA	4		152.5	5/8-11 UNC	162	65	130	38.9	77.7	101.6	115.5	27.4	31.8	38.1	128	245

尺寸表 (公制螺纹)


型号		公称	a	b	c	d	e	f	g	h	j	k	l	m	n	p	O型圈尺寸规格 AS568-
螺纹型	焊接型																
FL1-6-06P-10-JA-S4-M		3/4	3/4	52.5	M10	65	23.8	47.6	11.1	22.2	19.1		14		27.8	39.7	214
	FL1-6-06W-10-JA-M											27.7	12.7	14.3	19.1		
FL1-8-08P-10-JA-S4-M		1	1	58.5	M10	70	26.2	52.4	13.1	26.2	25.4		16.1		30.7	46	219
	FL1-8-08W-10-JA-M											34.5	13.8	15.9	23		
FL1-10-10P-10-JA-S4-M		1-1/4	1-1/4	73	M10	79	29.4	58.7	15.1	30.2	31.8		15.8		36	52.4	222
	FL1-10-10W-10-JA-M											43.2	18.2	17.5	28.6		
FL1-12-12P-10-JA-S4-M		1-1/2	1-1/2	82.5	M12	93.5	35	69.9	17.8	35.7	38.1		20		40.6	61.9	225
	FL1-12-12W-10-JA-M											49.1	18.6	19.1	32		
FL1-16-16P-10-JA-S4-M		2	2	96.5	M12	101.5	38.9	77.8	21.5	42.9	50.8		20		40.6	73	228
	FL1-16-16W-10-JA-M											61.1	18.8	22.2	36.8		
FL1-20-20P-10-JA-S4-M		2-1/2	2-1/2	108.5	M12	114.5	44.5	88.9	25.4	50.8	63.5		16.6		49	85.7	232
	FL1-20-20W-10-JA-M											77.1		25.4			

4 螺栓法兰盘 F L


●螺纹型 P S（直接）

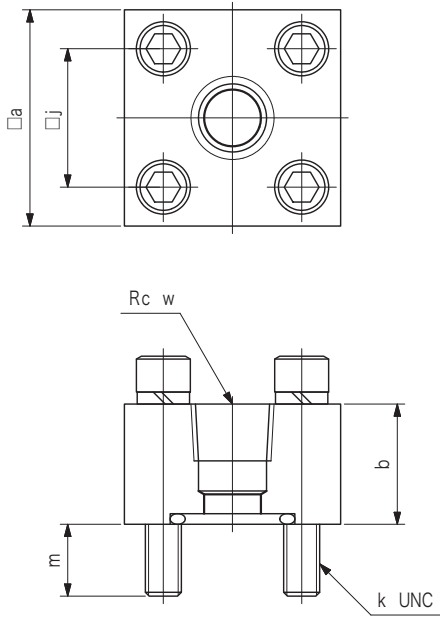

●焊接型 T S（直接）

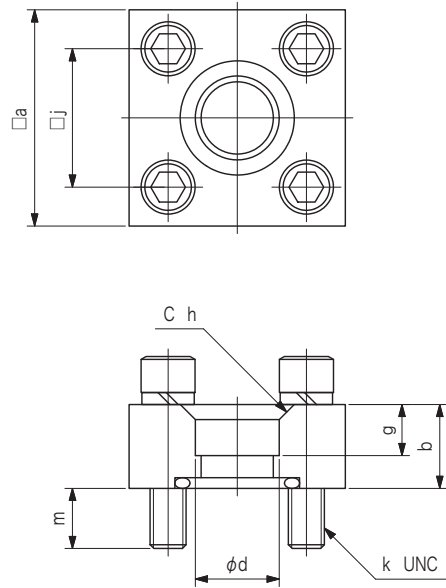

●对接孔

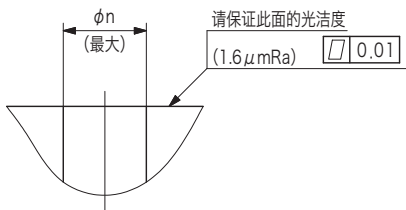

尺寸表

型号		公称	w	a	b	d	g	h	j	k	m	n	O型圈尺寸规格 AS568-
螺纹型	焊接型												
FL-04-PS-20-JA-J	FL-04-TS-20-JA-S18	1/2	1/2	57.2	31.8				36.6	3/8-16	15.8	20.6	215
					22.2	22.2	13.5	4			12.7		
FL-06-PS-20-JA-J		3/4	3/4		31.8						15.8		
	FL-06-TS-20-JA-S18				22.2	27.7	13.5	4			12.7		
FL-08-PS-20-JA-J	FL-08-TS-20-JA-S18	1	1	76.2	38.1				50.8	1/2-13	14.7	31.8	222
					25.4	34.5	15.9	4			21		
FL-10-PS-20-JA-J		1-1/4	1-1/4		38.1						14.7		
	FL-10-TS-20-JA-S18				25.4	43.2	15.9	4			21		
FL-12-PS-20-JA-J	FL-12-TS-20-JA-S18	1-1/2	1-1/2	101.6	44.5				69.8	5/8-11	21	50.8	228
					31.3	49.2	22.2	6			21.5		
FL-16-PS-20-JA-J		2	2		44.5						21		
	FL-16-TS-20-JA-S18				31.3	61.1	22.2	6			21.5		
FL-20-PS-20-JA-J	FL-20-TS-20-JA-S18	2-1/2	2-1/2	139.6	57.1				95.2	7/8-9	33.4	73.0	236
					38.1	77.1	27	6					
FL-24-PS-20-JA-J		3	3		57.1								
	FL-24-TS-20-JA-S18				38.1	90	27	6					

注)

- ・最高使用压力：21 MPa
- ・附带 O 型圈、螺栓、弹簧垫圈。